



GRUPO MAMSA

ALQUILER Y VENTA DE MAQUINARIA


- Desde 1979 -

FICHA TÉCNICA

Maquinaria profesional
Sostenible · Respetuosa · Eficaz

900 460 060

www.grupomamsa.com

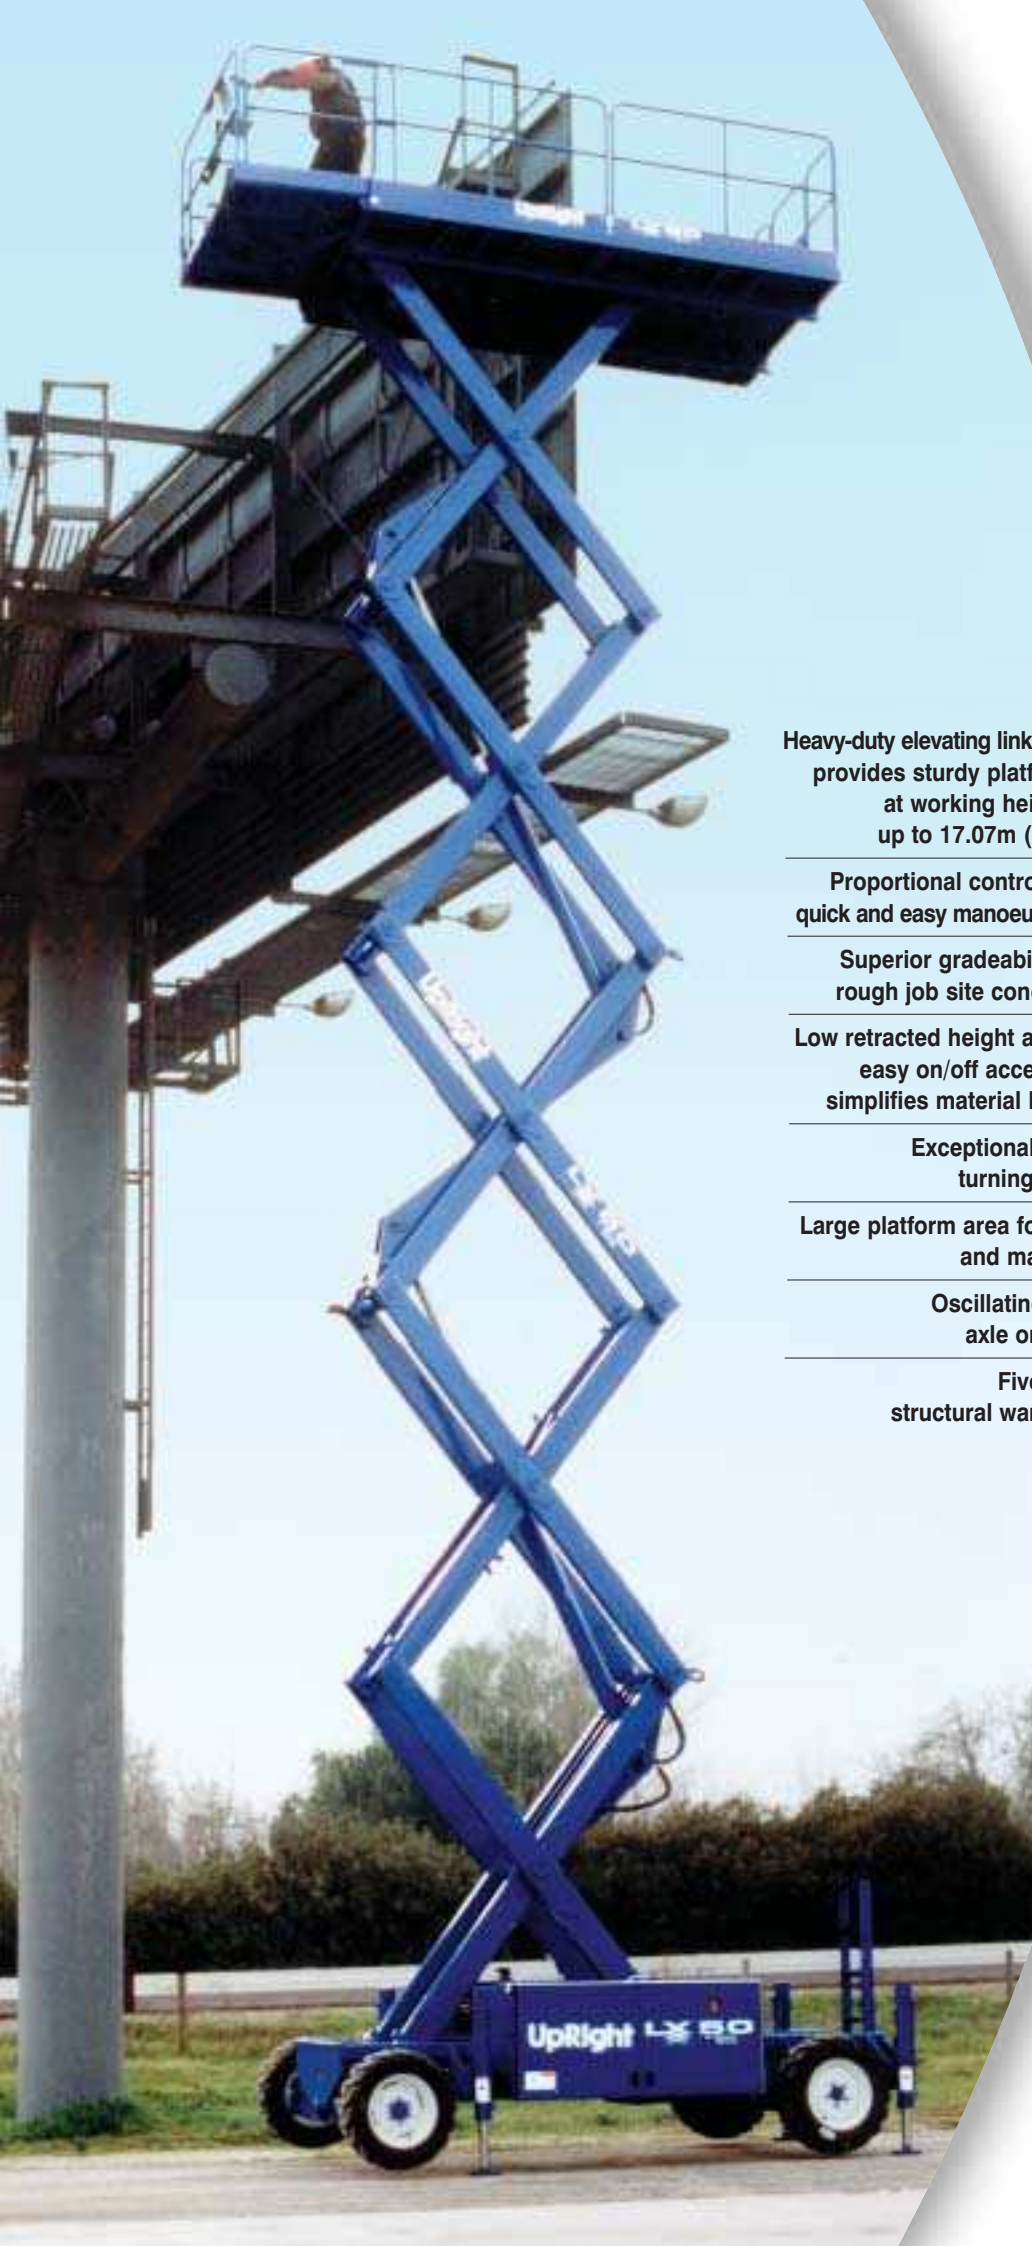A blue UpRight LX50 scissor lift is shown in its fully extended position, reaching a height of approximately 17.07m (56ft). The lift is positioned next to a large, dark industrial structure, possibly a bridge or a large building. The lift's platform is at the top, and a person is visible on it. The lift's base is on a paved surface, and the background shows some trees and a clear sky.

UpRight
LX50

Scissor lifts

large deck & super-deck

Heavy-duty elevating linkage provides sturdy platform at working heights up to 17.07m (56ft.)

Proportional controls for quick and easy manoeuvring

Superior gradeability for rough job site conditions

Low retracted height assures easy on/off access and simplifies material loading

Exceptionally tight turning radius

Large platform area for tools and materials

Oscillating front axle on 4WD

Five year structural warranty



specifications	LX50 Single Deck	LX50 Double Deck	LX50 Supa-deck
working height (A)	17.07m. (56ft.)*	17.07m. (56ft.)*	17.07m. (56ft.)*
platform height (max.) (B)	15.1m. (50ft.)	15.1m. (50ft.)	15.1m. (50ft.)
platform capacity (max.)			
- one deck extended	454kg. (1000lbs.)	-	-
- two decks extended	-	340kg. (750lbs.)	340kg. (750lbs.)
- on deck extension	227kg. (500lbs.)	227kg. (500lbs.)	227kg. (500lbs.)
platform size			
- with one deck extended	1.73m. (68ins.) x 4.8m. (190ins.)	-	-
- with two decks extended	-	1.73m. (68ins.) x 7.06m. (224ins.)	1.73m. (68ins.) x 7.06m. (224ins.)
- with decks retracted	68ins. (1.73m.) x 156ins. (3.96m.)	1.73m. (68ins.) x 3.96m. (156ins.)	1.73m. (68ins.) x 3.96m. (156ins.)
width (C)	2.29 m. (90 ins.)	2.29 m. (90 ins.)	2.29 m. (90 ins.)
length (D)			
- with one deck extended	4.8m. (16ft.)	-	-
- with two decks extended	-	5.6m. (18ft.8ins.)	7.01m. (23ft.)
- with decks retracted	4m. (13ft.3ins.)	4m. (13ft.3ins.)	4m. (13ft.3ins.)
height stowed (E)	2.9m. (9ft.8ins.)	2.9m. (9ft.8ins.)	2.9m. (9ft.8ins.)
- with guardrails lowered	2.03m. (6ft.8ins.)	2.03m. (6ft.8ins.)	2.03m. (6ft.8ins.)
weight			
- 2WD electric	n/a	n/a	n/a
- 2WD bi-energy	n/a	n/a	n/a
- 4WD diesel	5,910 kg. (13,030 lbs.)	6,241kg. (13,760 lbs.)	6,193kg. (13,653 lbs.)
inside turning radius	1.22m. (48ins.)	1.22m. (48ins.)	1.22m. (48ins.)
gradeability			
- 2WD electric	n/a	n/a	n/a
- 2WD bi-energy	n/a	n/a	n/a
- 4WD diesel	13.5° (24%)	13.5° (24%)	13.5° (24%)
lift speed			
- 2WD electric	n/a	n/a	n/a
- 2WD bi-energy	n/a	n/a	n/a
- 4WD diesel	80 secs. / 112 secs.	80 secs. / 112 secs.	80 secs. / 112 secs.
drive speed (max.)		4.9km/h. - 0.5km/h. (2.9mph. - 3.1mph.)	
- with platform raised		0.48km/h. - 0.8km/h. (0.3mph. - 0.5mph.)	
tires			
- 2WD electric	n/a	n/a	n/a
- 2WD bi-energy	n/a	n/a	n/a
- 4WD diesel	10 x 16.5 NHS	10 x 16.5 NHS	10 x 16.5 NHS
toeboards	152mm. (6ins.)	152mm. (6ins.)	152mm. (6ins.)
power source			
- 2WD electric	n/a	n/a	n/a
- 2WD bi-energy	n/a	n/a	n/a
- 4WD diesel	Kubota D905E	Kubota D905E	Kubota D905E

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.

Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

Proportional controls	Quick folding guardrail system
Easy access service modules	Multiple disc, dual wheel parking brake
Oscillating front axle 4WD	Outriggers
Descent alarm	(standard on LX50 supa-deck)
Tilt alarm	1 year parts/service
Power to platform	5 year structural warranty
Tilt alarm	

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe/Africa/M. East
Tel + 353 1 620 9300
Fax + 353 1 620 9301

Southern Europe
Tel + 34 91 849 37 41
Fax + 34 91 849 37 41

Germany
Tel + 49 221 1706527
Fax + 49 221 1706536

UK
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255


Singapore
Tel + 65 225 1322
Fax + 65 225 5157

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

web: www.upright.com
e-mail: marketing@upright.com

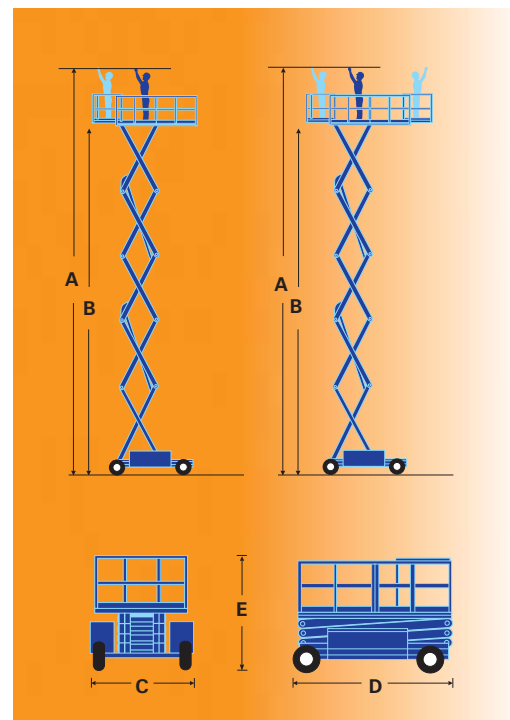

manufactured by

UpRight

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.	
	This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

options

- Dual roll-out deck extension
- Air line to platform
- Flashing amber beacon
- All motion alarm
- Horn
- Poly-filled tyres
- Diesel exhaust scrubber
- Special paint colours
- Environmental green oil